



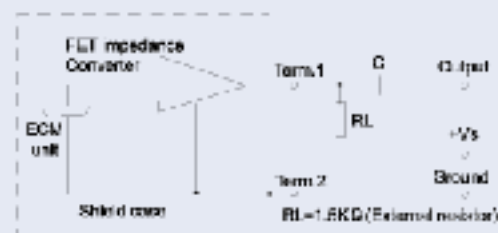

SENSITIVITY	靈 敏 度
SENSITIVITY REDUCTION	靈敏度減
FREQUENCY	頻 率
MAX. WORKING VOLTAGE	最大工作電壓
CURRENT CONSUMPTION	電流消耗
S/N RATIO	信 噪 比
STORAGE TEMPERATURE	儲存溫度
WEIGHT	重 量


Schematic Diagram

測定電路圖

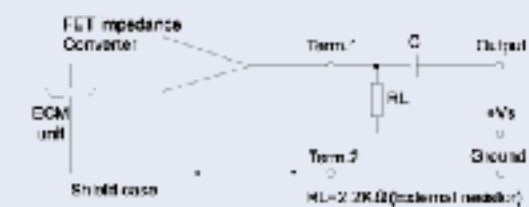



Dimensions (Unit: mm±0.2)

尺 寸 圖

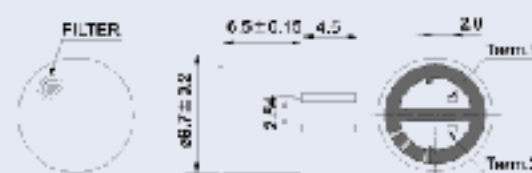

Typical Frequency Response Curve

頻率響應圖

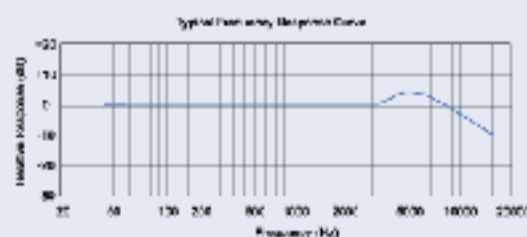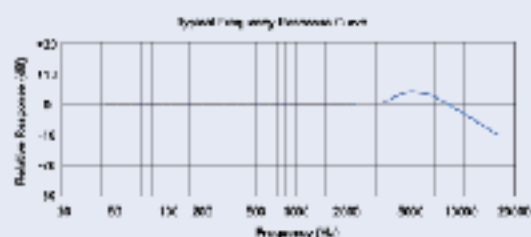

FEATURES

- Omnidirectional type
- Useful for almost any type of telephone and other applications

特色

- 全指向性
- 適用於任何電話機或其他用途

OBO-04FN-0B

$V_s=4.5V, R_L=2.2K\Omega$ $V_s=1.5V, R_L=1.5K\Omega$

$-38 \pm 3dB$ $-40 \pm 3dB$ $-42 \pm 3dB$ $-44 \pm 3dB$

$F=1KHz, 0dB=1V/Pa$

Within $-3dB$ at $1.5V$ compare to $3.0V$

$50-15,000Hz$

Max. $10V$

Max. $0.5mA$

More than $50dB$

$-25^{\circ}C$ to $+70^{\circ}C$

Max. $1.0gm$

OBO-04FP-0B